

Hydraulic Excavator

PC350LC/NLC-8 **High Reach Demolition Specification**

ENGINE POWER 194 kW / 260 HP @ 1.950 rpm

OPERATING WEIGHT

PC350LC-8: 38.895 - 48.190 kg PC350NLC-8: 38.785 - 54.195 kg

ATTACHMENT TOOL WEIGHT

max. 2.500 kg

Specifications

ENGINE

Model Komatsu SAA6D114E-3
TypeCommon rail direct injection, water-cooled,
emissionised, turbocharged, after-cooled diesel
Engine power
at rated engine speed 1.950 rpm
ISO 14396194 kW / 260 HP
ISO 9249 (net engine power)184 kW / 247 HP
No. of cylinders6
Bore × stroke
Displacement8,27 ltr
Battery
Alternator24 V/60 A
Starter motor
Air filter typeDouble element type with monitor panel
dust indicator and auto dust evacuator
Cooling Suction type cooling fan with radiator fly screen

HYDRAULIC SYSTEM

TypeHydrauMind. Closed-centre system with load sensing
and pressure compensation valves
Additional circuits2 additional circuits are installed
Main pump2 variable displacement piston pumps supplying
boom, arm, bucket, swing and travel circuits
Maximum pump flow 2 × 268 ltr/min
Relief valve settings
Implement380 bar
Travel380 bar
Swing285 bar
Pilot circuit 33 bar

UNDERCARRIAGE

Construction	X-frame centre section with box section track-frames
	box section track-traines
Track assembly	
Type	Fully sealed
Shoes (each side)	
Tension	Combined spring and hydraulic unit
Rollers	
,	

SWING SYSTEM

Туре	Axial piston motor driving through
	planetary double reduction gearbox
Swing lock	Electrically actuated wet multi-disc
	brake integrated into swing motor
Swing speed	0 - 9,5 rpm
Swing torque	102,9 kNm

DRIVES AND BRAKES

Steering control	2 levers with pedals giving full
	independent control of each track
Drive method	Hydrostatic
Travel operation	Automatic 3-speed selection
Max. travel speeds	
Lo / Mi / Hi	3,2 / 4,5 / 5,5 km/h
Maximum drawbar pull	26.900 kg
Brake system	Hydraulically operated discs
	in each travel motor

SERVICE REFILL CAPACITIES

Fuel tank	605 ltr
Radiator	32 ltr
Engine oil	35 ltr
Swing drive	16,5 ltr
Hydraulic tank	188 ltr
Final drive (each side)	9 ltr


ENVIRONMENT

Engine emissionsFully complies with EU Stage IIIA exhaust emission regulations
Noise levels
LwA external
LpA operator ear71 dB(A) (ISO 6396 dynamic test)
Vibration levels (EN 12096:1997)*
Hand/arm $\leq 2.5 \text{ m/s}^2$ (uncertainty K = 0.22 m/s ²)
Body≤ 0,5 m/s² (uncertainty K = 0,12 m/s²)
* for the purpose of risk assessment under directive 2002/44/EC,
please refer to ISO/TR 25398:2006.

OPERATING WEIGHT (APPR.)


	HIGH REACH				MEDIUM REACH			EXCAVATION BOOM				
	PC35	50LC-8	PC350	ONLC-8	PC35	50LC-8	PC350	NLC-8	PC35	60LC-8	PC350	ONLC-8
Triple grouser shoes	Operating weight	Ground pressure										
600 mm	47.810 kg	0,91 kg/cm ²	47.700 kg	0,91 kg/cm ²	46.550 kg	0,89 kg/cm ²	46.440 kg	0,88 kg/cm ²	38.651 kg	0,74 kg/cm ²	38.541 kg	0,74 kg/cm ²
700 mm	48.190 kg	0,78 kg/cm ²	48.080 kg	0,78 kg/cm ²	46.930 kg	0,77 kg/cm ²	46.820 kg	0,77 kg/cm ²	39.031 kg	0,64 kg/cm ²	39.141 kg	0,64 kg/cm ²

Operating weight, including specified work equipment. High reach and medium reach includes attachment weight of 2.500 kg. Excavation boom equipment includes 3,2 m arm and 1.290 kg bucket. All include operator, lubricant, coolant, full fuel tank. Optional Hydraulic Wide Gauge (HWG) undercarriage adds approx. 6.115 kg to the machine weight (compared with NLC undercarriage).

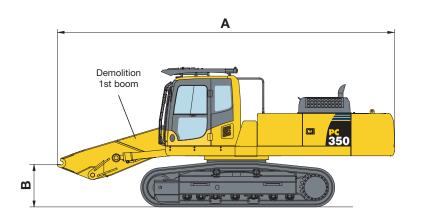

MACHINE DIMENSIONS


Α	Transport length	8.060 mm
В	Maximum boom height (incl. hydraulic lines)	1.500 mm
	Transport weight with LC undercarriage (700 mm shoes, not including additional counterweight)	33.400 kg
	Additional weight for hydraulic wide gauge	6.115 kg
	Additional counterweight (1.470 mm × 730 mm × 535 mm)	4.490 kg

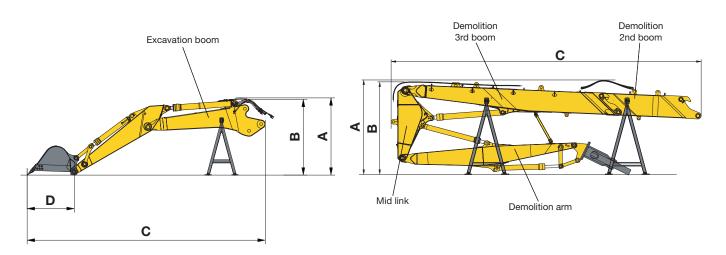

EQUIPMENT	EXCAVATION	EXCAVATION BOOM			
	2,6 m arm	3,2 m arm			
A Total height (incl. hydraulic lines)	2.625 mm	2.600 mm	3.205 mm		
B Height	2.540 mm	2.515 mm	3.140 mm		
C Length	8.110 mm	8.900 mm	10.515 mm		
D Tip radius	1.675 mm	1.675 mm	-		
Support weight	304 kg	304 kg	755 kg		
2nd boom weight	2.490 kg	2.490 kg	1.270 kg		
3rd boom weight 1)	-	-	2.500 kg		
Mid link weight	-	-	810 kg		
Arm weight ¹⁾	1.710 kg	1.850 kg	1.790 kg		
Bucket weight	1.290 kg	1.290 kg	-		
Total weight ²⁾	6.040 kg	6.180 kg	8.555 kg		

¹⁾ Not including hydraulic cylinder.
2) Including hydraulic cylinders, links, hydraulic lines, stands and stated attachment weight.

Transport Dimensions

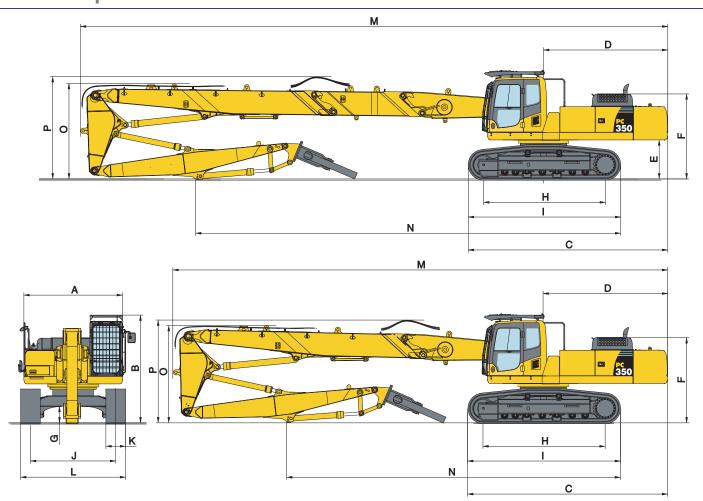


M	ACHINE DIMENSIONS	HIGH REACH	MEDIUM REACH
Α	Overall width of upper structure 1)	2.995 mm	2.995 mm
В	Overall height of cab, with FOPS 2)	3.305 mm	3.305 mm
	Overall height of cab, without FOPS 2)	3.100 mm	3.100 mm
С	Overall length of basic machine	6.250 mm	6.250 mm
D	Tail length	3.775 mm	3.775 mm
Е	Clearance under counterweight	1.185 mm	1.185 mm
F	Machine tail height	2.585 mm	2.585 mm
G	Ground clearance	498 mm	498 mm
	Ground clearance (HWG undercarriage)	449 mm	449 mm
Н	Tumbler centre distance	4.030 mm	4.030 mm
ī	Track length	4.955 mm	4.955 mm
J	Track gauge	2.590 mm (2.390 mm)	2.590 mm (2.390 mm)
	Track gauge (HWG undercarriage)	2.280 - 3.180 mm	2.280 mm - 3.180 mm
K	Track shoe width (700 mm only for HWG undercarriage)	600 mm, 700 mm	600 mm, 700 mm
L	Overall track width with 600 mm shoes ³⁾	3.190 mm (2.990 mm)	3.190 mm (2.990 mm)
	Overall track width with 700 mm shoes ³⁾	3.290 mm (3.090 mm)	3.290 mm (3.090 mm)
	Overall track width with 700 mm shoes (HWG undercarriage)	2.980 mm - 3.880 mm	2.980 mm - 3.880 mm
М	Transport length	17.800 mm	15.150 mm
N	Length on ground (transport)	16.100 mm	13.450 mm
0	Overall height (to top of boom)	2.880 mm	2.950 mm
Р	Overall height (to top of hose)	3.150 mm	3.150 mm

¹⁾ Overall width of upper structure excludes side guards, handrails and mirrors. Side guards can be removed if transport width of less than 3 m is required. 2) Overall height with Hydraulic Wide Gauge (HWG) undercarriage: + 105 mm

³⁾ NLC figures in brackets ()


EXCAVATION BOOM - BENT POSITION

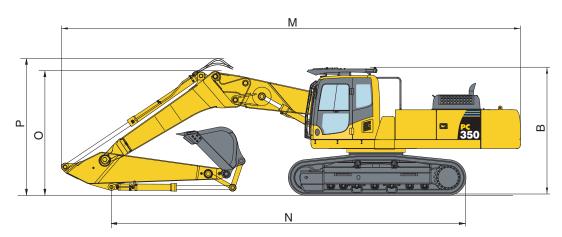

ARM LENGTH	2,6 m	3,2 m
M Overall transport length	12.045 mm	11.955 mm
N Transport length	6.930 mm	9.220 mm
B Transport height (to top of cab, with FOPS)	3.305 mm	3.305 mm
Transport height (to top of cab, without FOPS)	3.085 mm	3.085 mm
O Transport height (to top of boom)	3.420 mm	3.225 mm
P Transport height (to top of hose)	3.740 mm	3.550 mm

Overall height with Hydraulic Wide Gauge (HWG) undercarriage: + 105 mm

EXCAVATION BOOM - STRAIGHT POSITION

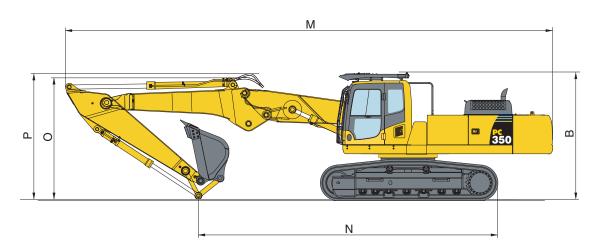


ARM LENGTH	2,6 m	3,2 m
M Overall transport length	12.760 mm	12.670 mm
N Transport length	8.520 mm	7.780 mm
B Transport height (to top of cab, with FOPS)	3.305 mm	3.305 mm
Transport height (to top of cab, without FOPS)	3.085 mm	3.085 mm
O Transport height (to top of boom)	3.050 mm	3.165 mm
P Transport height (to top of hose)	3.300 mm	3.400 mm

Overall height with Hydraulic Wide Gauge (HWG) undercarriage: + 105 mm

Working Range

HIGH REACH DEMOLITION

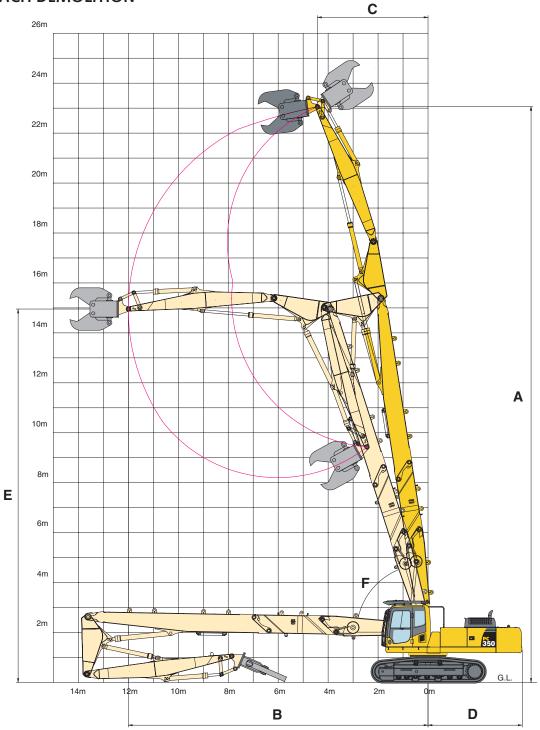


HIGH REACH DEMOLITION

Α	Max. working height (to pin at arm end)	23.060 mm
В	Max. forward reach	12.000 mm
С	Min. swing radius of arm end pin (max. height)	4.430 mm
D	Tail swing radius	3.820 mm
Е	Height at max. reach	14.955 mm
F	Min. boom angle from ground at max. height	75°

This working range is applicable through 360 degrees (depending upon fitted attachment) (for LC or HWG undercarriage). For operator and jobsite safety, Komatsu recommend that high reach demolition machines work in line with the trackframe wherever possible.

MEDIUM REACH DEMOLITION

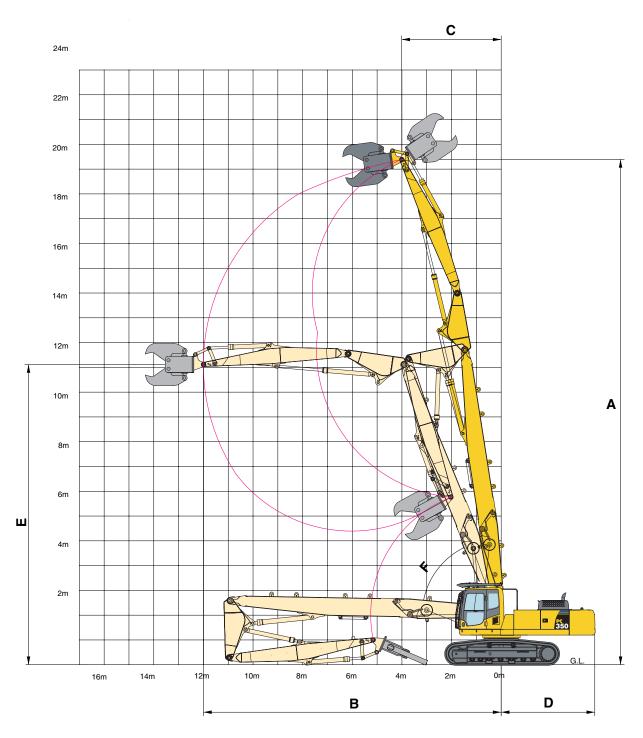


MEDIUM REACH DEMOLITION

Α	Max. working height (to pin at arm end)	20.390 mm
В	Max. forward reach	12.000 mm
С	Min. swing radius of arm end pin (max. height)	4.010 mm
D	Tail swing radius	3.820 mm
Е	Height at max. reach	11.950 mm
F	Min. boom angle from ground at max. height	70°

This working range is applicable through 360 degrees (depending upon fitted attachment) (for LC or HWG undercarriage). For operator and jobsite safety, Komatsu recommend that high reach demolition machines work in line with the trackframe wherever possible.


Working Range

EXCAVATION BOOM - BENT POSITION

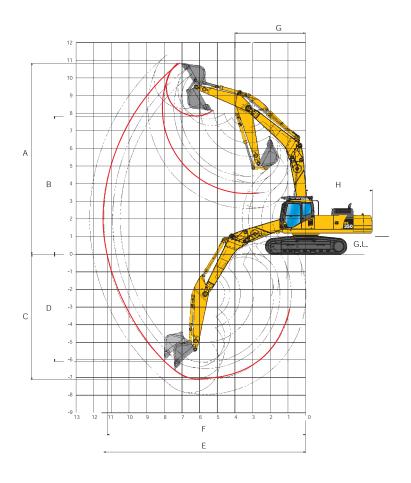

ARM LENGTH	2,6 m	3,2 m
A Max. digging height	10.730 mm	10.845 mm
B Max. dumping height	7.665 mm	7.810 mm
C Max. digging depth	6.485 mm	7.120 mm
D Max. vertical wall digging depth	5.675 mm	6.075 mm
E Max. digging reach	10.925 mm	11.425 mm
F Max. digging reach at ground level	10.735 mm	11.245 mm
G Min. swing radius (bucket loaded)	4.095 mm	3.970 mm
H Tail swing radius	3.820 mm	3.820 mm


EXCAVATION BOOM - STRAIGHT POSITION

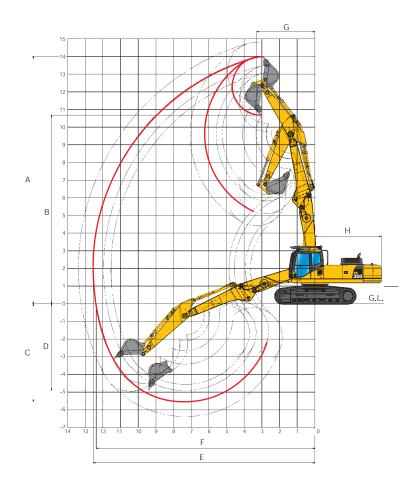

ARM LENGTH	2,6 m	3,2 m
A Max. digging height	13.520 mm	14.020 mm
B Max. dumping height	10.180 mm	10.680 mm
C Max. digging depth	4.915 mm	5.550 mm
D Max. vertical wall digging depth	4.295 mm	4.910 mm
E Max. digging reach	11.955 mm	12.540 mm
F Max. digging reach at ground level	11.780 mm	12.375 mm
G Min. swing radius (bucket loaded)	3.265 mm	3.295 mm
H Tail swing radius	3.820 mm	3.820 mm

Lifting Capacity

PC350LC-8



- A Reach from swing center
- B Bucket hook height
- C Lifting capacities, including bucket, bucket linkage and cylinder
- Rating over front
- ☐⇒ Rating over side
- Rating at maximum reach

When removing bucket, linkage or cylinder, lifting capacities can be increased by their respective weights.

EXCAVATION BOOM - BENT POSITION

	A 0		9,0 m 7,5 m			m	6,0	m	4,5 m		1,5 m			
Arm length	В		Å	<u></u>	Å	C≫	Å	□≔	ď	C≫	å	C≫	Å	C≫
2,6 m 1.014 kg 1,38 m ³	9,0 m 7,5 m 6,0 m 4,5 m 3,0 m 1,5 m 0,0 m -1,5 m -3,0 m -4,5 m	kg kg kg kg kg kg kg kg	7.150* 6.800* 6.750* 6.950* 6.600 6.400 6.500 6.950 8.000	7.150* 6.400 5.150 4.450 4.050 3.900 3.900 4.150 4.800	7.650 7.450 7.250 7.050 7.000	4.800 4.600 4.400 4.250 4.150	8.900* 10.250* 10.500 10.050 9.600 9.300 9.150 9.150	7.150 7.000 6.700 6.250 5.850 5.600 5.450 5.450	11.700* 13.200* 14.300 13.550 13.050 12.850 12.900 11.300*	10.350 9.600 8.750 8.050 7.650 7.500 7.550 7.800	17.400* 17.200* 11.450* 14.200* 18.050* 15.950* 14.100*	15.000 13.050 11.450* 11.550 11.550 11.750 12.150	10.450* 15.950*	10.450* 15.950*
3,2 m 1.014 kg 1,38 m ³	9,0 m 7,5 m 6,0 m 4,5 m 3,0 m 1,5 m 0,0 m -1,5 m -3,0 m -4,5 m	kg kg kg kg kg kg kg kg	4.950* 4.750* 4.750* 4.900* 5.200* 5.750* 5.900 6.250	4.950* 4.750* 4.600 4.000 3.650 3.500 3.500 3.650	6.400 7.700 7.450 7.200 7.000 6.850	5.000 4.850 4.600 4.350 4.150 4.050	7.700* 9.500* 10.300* 10.150 9.650 9.250 9.050	7.350 7.150 6.750 6.300 5.900 5.550 5.350	12.200* 13.900* 13.700 13.100 12.800	9.850 9.000 8.200 7.650 7.400	15.750* 17.350* 17.400* 16.300* 17.750*	15.750 13.800 12.300 10.450 10.250	24.300* 10.600*	24.300* 10.600*

EXCAVATION BOOM - STRAIGHT POSITION

		Α	•	•	10,	5 m	9,0	m	7,5	m	6,0	m	4,5	m
Arm length	В		Į.	<u></u>	Ž	□ >==	Å	□ >=	Ž.	□₩	Å		Å	□ >=
2,6 m	9,0 m 7,5 m 6,0 m 4,5 m 3,0 m 1,5 m 0,0 m -1,5 m	kg kg kg kg kg kg	7.650* 7.050* 6.150 5.550 5.300 5.200 5.350 5.650*	5.650 4.400 3.700 3.300 3.100 3.050 3.100 3.350	5.500 5.400 5.400	3.250 3.150 3.150	7.550 7.500 7.300 7.100 6.900 6.750 6.750	4.700 4.650 4.500 4.250 4.100 3.950 3.950	10.350* 10.650 10.350 9.900 9.450 9.050 8.850 8.800	6.800 6.800 6.500 6.100 5.700 5.350 5.200 5.150	10.750* 10.850* 13.900* 14.200 13.300 12.650 12.450 12.050*	10.300 10.100 9.500 8.650 7.850 7.300 7.100	9.850* 9.700* 16.750*	9.850* 9.700* 15.200
	-3,0 m -4,5 m	kg kg					5.650*	4.050	7.850*	5.250	9.150*	7.300		
2	9,0 m 7,5 m 6,0 m 4,5 m	kg kg kg	5.250* 4.900* 4.750* 4.700*	4.750 3.800 3.200 2.900	5.600 5.550	3.350 3.300	7.650 7.550 7.350	4.800 4.700 4.500	8.300* 8.700* 9.950* 10.000	6.950 6.900 6.600 6.200	8.200* 8.300* 10.100* 14.500	8.200* 8.300* 9.700 8.900	7.300* 9.950*	7.300* 9.950*
3,2 m	3,0 m 1,5 m 0,0 m -1,5 m -3,0 m -4,5 m	kg kg kg kg kg	4.750 4.650 4.750 5.050	2.700 2.650 2.700 2.900	5.450 5.300 5.250 5.250	3.200 3.050 3.000 3.000	7.050 6.850 6.650 6.600 6.650	4.250 4.000 3.850 3.800 3.850	9.500 9.050 8.800 8.650 8.700	5.750 5.350 5.100 5.000 5.050	13.550 12.800 12.400 12.300 10.500*	8.050 7.400 7.050 6.950 7.050	9.100*	9.100*

Lifting capacity table is published for guidance only, the machine is not intended for use as a crane. Lifting capacities are stated in kg, on the tip of the arm, for machine on firm, level supporting surface.

The weight of any attachment used should be deducted from the values shown, to calculate payload.

Indicated loads are based on ISO 10567 standard and do not exceed 75% of tipping or 87% of hydraulic capacity (indicated by *). Lifting capacity of the machine is limited by machine stability, hydraulic capacity and maximum permissible load of the attachment.

Standard and Optional Equipment

ENGINE

Komatsu SAA6D114E-3, 194 kW turbocharged common rail direct injection diesel engine EU Stage IIIA compliant	•
Suction type cooling fan with radiator fly screen	•
Automatic engine warm-up system	•
Engine overheat prevention system	•
Fuel control dial	•
Auto-deceleration function	•
Engine key stop	•
Engine ignition can be password secured on request	•
Alternator 24 V/60 A	•
Starter motor 24 V/11 kW	•
Batteries 2 × 12 V/140 Ah	•

CABIN

Demolition Safety SpaceCab™, with ISO 10262
level 2 FOPS guards and roof screen wash/wiper,
safety glass windows, pull-up type front window
with locking device, fixed roof window with wiper
and washer, removable lower window, front
window wiper

Tilting cab, with control equipment, hydraulic
power hoses and cab raise cylinders

Heated air suspension seat with lumbar support,
height adjustable arm rests and retractable seat
belt

Automatic climate control system

12 Volt power supply

Beverage holder and magazine rack

Hot and cool box

Radio

SAFETY EQUIPMENT

Rear view camera system	•
Electric horn	•
Overload warning device	•
Lockable fuel cap and covers	•
Audible travel alarm	•
Boom safety valves	•
Large handrails, r.h. rear-view mirror	•
Battery main switch	•
-	

HYDRAULIC SYSTEM

UNDERCARRIAGE

Track frame under-guards

Track roller guards

(HWG: 700 mm only)

undercarriage

Electronic closed-centre load sensing (E-CLSS) hydraulic system (HydrauMind)	•
Pump and engine mutual control (PEMC) system	•
5-working mode selection system; power mode, economy mode, breaker mode, attachment mode and lifting mode	•
PowerMax function	•
Adjustable PPC wrist control levers for arm, boom, bucket and swing, with sliding proportional control for attachments and 3 auxiliary buttons	•
In-line filter for hydraulics	•
Two additional service valves (full flow)	•
One additional service valve (1/2 flow)	•
Drain circuit for hydraulic attachment rotation	•

WORK EQUIPMENT

Demolition first boom:
Includes demolition first boom, fitted with hydraulic
pipework, with quick connectors, suitable for
operation of high reach demolition work equipment
and operation of rotating crusher attachment

Two-mode boom control

Excavation arm assemblies:

Includes bucket cylinder and piping, bucket linkage, 2,6 m or 3,2 m standard arm, with 2 additional dual \circ flow proportional service circuits, with drain circuit for hydraulic attachment rotation motors

Excavation boom:

Includes two position excavation boom
(bent/straight) to fit onto demolition first boom.
Associated pipework for excavation arm cylinder
and bucket cylinder. Quick connectors to suit
demolition first boom. With pipework suitable for
operation of excavation equipment and rotating
crusher attachment (includes pipework associated
with excavation boom)

Demolition second boom:

Includes demolition extension boom (2,7 m) fitted with hydraulic pipework, with quick connectors, suitable for operation of high reach demolition work equipment and operation of rotating crusher attachment

Demolition third boom:

0

0

0

Includes demolition third boom, mid link, high reach demolition arm, demolition attachment linkage. Fitted with hydraulic pipework, with quick ocnnectors, suitable for operation of high reach demolition work equipment and operation of rotating crusher attachment

Komatsu buckets

DRIVES AND BRAKES

Hydrostatic, 3-speed travel system with automatic	
shift and planetary gear type final drives, and	•
hydraulic travel and parking brakes	
PPC control levers and pedals for steering and	_
travel	•
PPC pedal for high reach demolition mid link	•

LIGHTING SYSTEM

Working lights: 2 revolving frame lights and 1 boom light, 4 cab roof (front) lights, 1 cab roof (rear) light, ● 1 counterweight (rear) light

OTHER EQUIPMENT

Heavy duty revolving frame with heavy duty demolition under covers and side guard protection	•
Counterweight prepared for demolition counterweight	•
Remote greasing for swing circle and pins	•
Electric refuelling pump with automatic shut off function	•
Standard colour scheme and decals	•
Parts book and operator manual	•
Additional counterweight. To fit into main demolition counterweight when high reach demolition equipment is installed. Removable for excavation operations. Included with any high reach boom equipment	0
Biodegradable oil for hydraulic system	0
Customised paint	0

SERVICE AND MAINTENANCE

600, 700 mm triple grouser track shoes

Full length track roller guards (not HWG)

LC, NLC or hydraulic adjustable wide gauge (HWG)

Automatic fuel line de-aeration	•
Double element type air cleaner with dust indicator and auto dust evacuator	•
$KOMTRAX^{TM}$ - Komatsu satellite monitoring system	•
Multi-function video compatible colour monitor with Equipment Management and Monitoring System (EMMS) and efficiency guidance	•
Toolkit and spare parts for first service	•
Service points	\cap

Further equipment on request

standard equipmentoptional equipment

0

Hydraulic Excavator

PC350LC/NLC-8 High Reach Demolition Specification

Your Komatsu partner:



Komatsu Europe International NV

Mechelsesteenweg 586 B-1800 VILVOORDE (BELGIUM)

Tel. +32-2-255 24 11 Fax +32-2-252 19 81 www.komatsu.eu

UESS13403 09/2010

Materials and specifications are subject to change without notice. **KOMATSU** is a trademark of Komatsu Ltd. Japan.